

HX SERIES

TECHNICAL DATASHEET

Product	Geogrid
Main function	Reinforcement


PARTNER
Texar

HX geogrids are a new generation of reinforcement geogrids. Compared to traditional geogrids (biaxial and triaxial), these geogrids provide superior reinforcement. The structure of NX geogrids consists of continuous and non-continuous ribs forming three opening geometries (hexagon, trapezoid and triangle) and a suspended hexagon.

Property	Test Method	HX5.5	HX165
Physical			
Rib shape	-	Rectangular	
Aperture shapes	-	Hexagonal, trapezoidal, triangular	
Structure	-	Coextruded and integrally formed	
Color identification	-	Black	
Rib dimensions			
Continuous parallel rib pitch ¹	-	80 mm	
Rib aspect ratio ²	-	> 1.0	
Node thickness ¹	-	3.0 mm	3.25 mm
Dimensions			
Width	-	3.8 m	
Length	-	100 m	

This technical information comes from the manufacturer and was transcribed by Texel
Properties are based on the Minimum Average Roll Value (MARV) except when specified otherwise.
The values entered are values obtained at the time of manufacture. Handling and storage conditions may change some properties.

- 1- Nominal dimensions
- 2- Ratio of the mid-rib depth to the mid-rib width

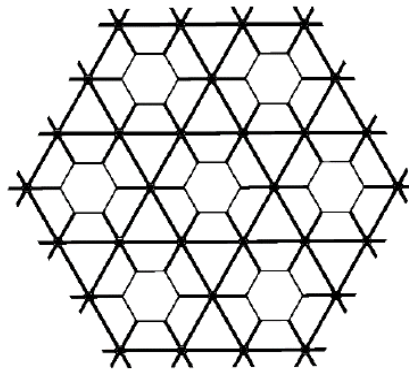

Revision : 2022-06-28